

TwistII Clean Screen Element Options



200 mesh/ 74 microns

Ultra-Fine
Blue

NEW for
Spring 2013



140 mesh/ 105 microns


Fine
Black

Our most
popular size
for common
applications



100 mesh/ 150 microns

Standard
Gray



60 mesh/ 250 microns

Medium
White



30 mesh/ 600 microns

Coarse
Brown

TWISTII CLEAN
INLINE WATER FILTERS
LAKOS

1365 North Clovis Avenue
Fresno, California 93727-2282
www.TwistIIClean.com

Replacing The Screen Element

If you wish to replace the TwistII Clean screen element, it is quite easy to do, but you should be aware the design of the smaller models (3/4 and 1 inch) is slightly different than the design used for the 1.5 inch T2C-150. This affects how the element is replaced.


T2C-075 (3/4 inch) T2C-100 (1 inch)

T2C-150 (1.5 inch)



If the TwistII Clean has already been installed and plumbed, **FIRST** turn **OFF** the water supply.

Unscrew the plastic bowl by hand.

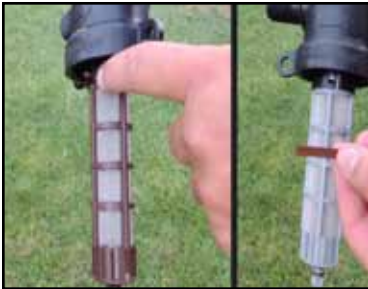


Make sure the unit is in the "run" position. The pin is easier to remove in this position.

Remove the pin holding the screen element in place. Don't lose it!



Pull the filter element straight off the housing. It should pull straight out.

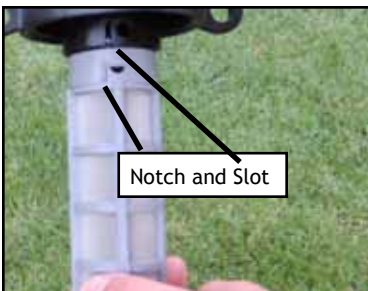

Insert the new filter element. The two notches at the top of element must align with the slots in the housing. The slots are offset, so the element will only fit one way. Insert the pin back into place.



Hand tighten the clear bowl back into the housing.



If the TwistII Clean has already been installed and plumbed, **FIRST** turn **OFF** the water supply.

Unscrew the plastic bowl by hand.



The 1.5 inch model has a clip on each side that secures the screen filter element in place.



If these two securing clip are both lifted at the same time, the filter can be easily removed.



Using one hand for each clip might be the best method. This is easiest after the filter has been installed. You might need to apply a little force to pull out the element as you lift the clips, since it may be stuck in place.



To install the new filter element simply line up the notches on the element with the clips on the housing, and gently push the element against the clips. You will hear a "click" when they lock. Hand tighten the bowl.